


Prowadnica kulkowa push to open H45 GX
 Ball bearing slide push to open H45 GX
 Шариковая направляющая push to open H45 GX







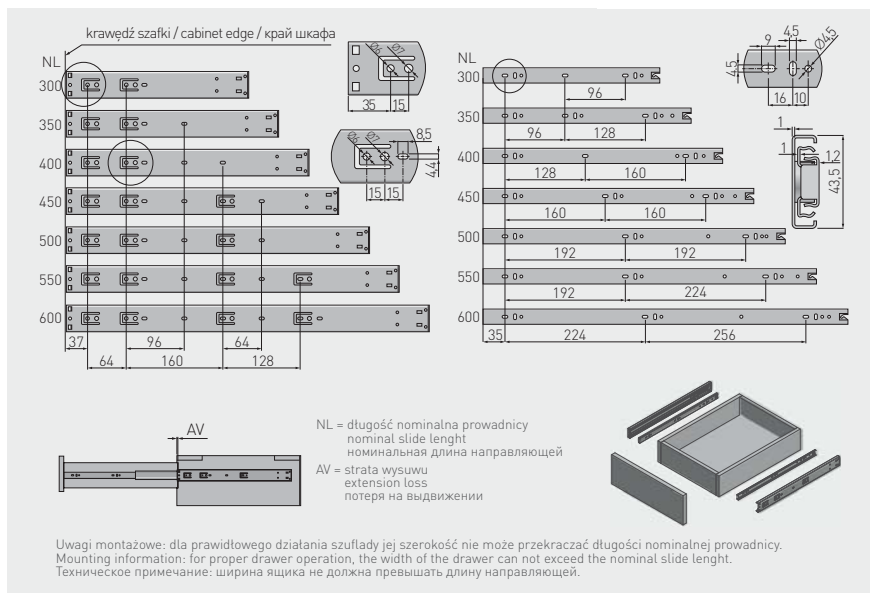

Możliwość zastosowania stabilizatora PB-D-P20STAB

Can be used with stabilizer PB-D-P20STAB

Возможность использования стабилизатора PB-D-P20STAB



		 L mm	 AV mm				
PK-P-H45-300-GX		300*	30	pełny full полное	25	ocynk galvanized гальванка	stal steel сталь
PK-P-H45-350-GX		350	-				
PK-P-H45-400-GX		400					
PK-P-H45-450-GX		450					
PK-P-H45-500-GX		500					
PK-P-H45-550-GX		550					
PK-P-H45-600-GX		600					

* Brak pełnego wysuwu / Not full extension / Неполное выдвигение

